MATIN TABLE LAMP
PRODUCT FACT SHEET

HAY

MATIN TABLE LAMP
DESIGN BY INGA SEMPÉ, 2018

The Matin Table Lamp offers a contemporary yet poetic design, with a construction that combines visual delicacy with physical robustness. It consists of a steel wire bent frame finished in polished brass with matte black hardware and is paired with a pleated cotton shade in a variety of vibrant colours. The light source is an integrated LED, offering a diffused downlight which is accompanied by a digital in-line dimmer control to adjust the output of light if required.

HIGHLIGHTS

· Part of a progressive and technologically advanced lighting collection.
· A family of contemporary table, ceiling, and wall lamps.
· Elegant table lamp with a steel wire bent frame, paired with a pleated cotton shade in different colours.
· CE approved.
· Integrated LED light source ensuring a life span of at least 25,000 hours of use.
· Inline step dimmer.
· Available in two sizes and suitable for both private and office environments.

DIMENSIONS
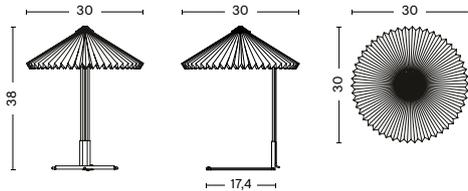
MATIN TABLE LAMP 300
WIDTH 30 CM
DEPTH 30 CM
HEIGHT 38 CM
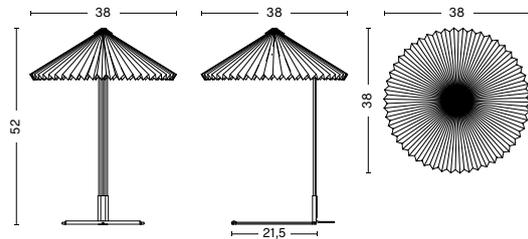
MATIN TABLE LAMP 380
WIDTH 38 CM
DEPTH 38 CM
HEIGHT 52 CM

MATERIALS

SHADE
Cotton fabric laminated with a PVC sheet. Black top screw in injection moulded ABS.

LAMP BODY
Bent steel wire with polished brass finish or mirror plated steel, precision cast steel counterweight and injection moulded ABS.

CORD
Black silicone cable.

INLINE SWITCH
Injection moulded ABS.

COLOUR & FINISH | LAMP BODY
Please note that the colour codes are indicative.

POLISHED
BRASS

MIRROR PLATED
STEEL

COLOUR & FINISH

Please note that the colour codes are indicative.

Matin Table Lamp 300

SHADE COLOUR	BODY COLOUR		POLISHED BRASS	MIRROR PLATED STEEL
WHITE			●	●
LAVENDER			●	●
YELLOW			●	
PEACH			●	
OXIDE RED			●	
BRIGHT RED			●	
GREEN			●	●
BLUE				●

COLOUR & FINISH

Please note that the colour codes are indicative.

Matin Table Lamp 380

SHADE COLOUR	BODY COLOUR		POLISHED BRASS
WHITE			●
LAVENDER			●
YELLOW			●
PEACH			●
OXIDE RED			●
BRIGHT RED			●
GREEN			●

TECHNICAL SPECIFICATIONS

LIGHT SOURCE	DIMMABLE	POWER SUPPLY	IP	CORD LENGTH	SWITCH
Integrated LED, 5W, 150lm, 2800K warm white	Yes	220-240V AC at 50/60Hz	20	200 cm	Inline step dimmer. Located 50 cm from lamp base.

TEST SPECIFICATIONS*

FLUX (LUMENS)	CCT (KELVIN)	CRI (1-100)
150lm	2800K, warm white	85

*Photometrics and the specification shown is taken using the integrated LED bulb fitted in the production luminaire.

PHOTOMETRICS
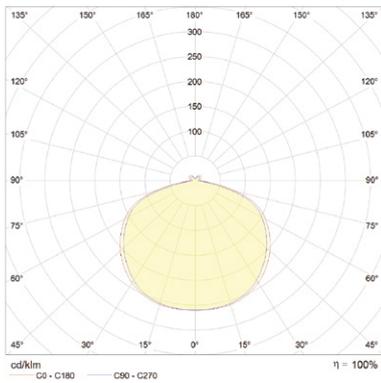
CERTIFICATES

CE APPROVED
This product has been assessed and complies with the essential requirements of the relevant European directives.

LED   CE   ⟨⟨⟩⟩   IP20   ⟨III⟩   ☒   UK CA

Tested according to the following European EN / IEC standards which relate specifically to electrical lighting products including
· EN 55015:2013 (radio disturbance)
· EN 61547:2009 (EMC immunity)
· EN 61000-3-2:2014 (EMC compatibility)
· EN 61000-3-3:2013 (EMC compatibility)
· EN 60598-2-4:1997 (portable luminaires)
· EN 60598-1:2015 (general requirements)
· EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.
LINK TO DIGITAL LIBRARY