

PRODUCT



COLOURS



// Black / Chrome



// Off-White / Chrome



// White / Chrome

Item no.: 001-0910X
+ style code

DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE PENDANT LAMP BL9S

Shade: Black, White or Off-White - Powder coated aluminium
Ceiling cup: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20

Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL9S, BL9M, BL9L, BL9XL



FACTS

MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm
Lamp rosette diameter: Ø120 mm
Shade height: 140 mm
Shade diameter: Ø160 mm
Cord - total length w/sw: App. 2500 mm
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE
395 g netto

PACKAGING TYPE
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM
L:26 x W:28 x H:20,5 cm

WEIGHT PACKAGING - MATERIAL TYPE

- Paper Egg crate: 306,5 g
- PE polybag: 60 g
- Umbraco key: 0,5 g
- PE polybag: 1 g
- Cardboard inside: 26,5 g
- Cardboard outside: 207 g

WEIGHT PACKAGING - TOTAL
996,5 g brutto

NUMBER OF PARCELS
1 pcs.

LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.
Please contact your local electrician.

- Lightbulb not included

BESTLITE BL9S // PENDANT, UK MODEL

Designed by Robert Dudley Best

BESTLITE COLLECTION

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

STANDARD

- British voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base


KOMPONENTS

- 01 // Shade Ø16 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube


Item no.: 001-0910X

MATERIAL

Shade: Powder coated aluminium
 Ceiling cup: Chromed steel
 Textile covered cord

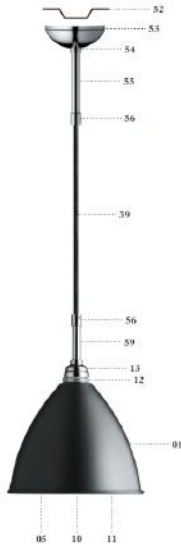

INSTALLATION INSTRUCTIONS

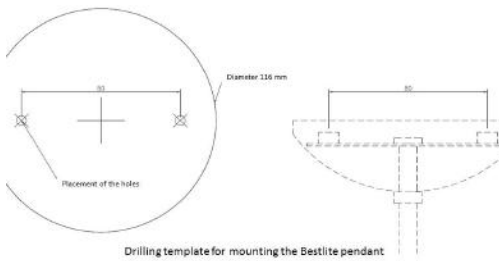

Designed by Robert Dudley Best

PRODUCT



Item no.: 001-0923X
+ style code

Don't polish the brass

DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE PENDANT LAMP BL9S

Shade: Charcoalblack, Matt-White or Grey
Ceiling cup: Brass with lacquered surface

Shade: Brass with lacquered surface
Ceiling cup: Brass with lacquered surface

RAL codes are indicative.

- Fabric wire - Black:
- Charcoal black/Brass / White inside // RAL 9011 / RAL 9003 // Gloss level 20 / Gloss level 20
- Grey w/Brass / White inside // RAL 2604005 / RAL 9003 // Gloss level 30 / Gloss level 20
- Brass w/Brass / White inside // - / RAL 9003 // - / Gloss level 20

- Fabric wire - Off-White:
- Matt-White w/Brass / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20

Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL9S, BL9M, BL9L, BL9XL



COLOURS



// Charcoal black / Brass

// Grey / Brass

// Matt-White / Brass

// All Brass

FACTS

MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm
Lamp rosette diameter: Ø120 mm
Shade height: 140 mm
Shade diameter: Ø160 mm
Cord - total length w/sw: App. 2500 mm
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE
395 g

PACKAGING TYPE
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM
L:26 x W:28 x H:20,5 cm

WEIGHT PACKAGING - MATERIAL TYPE

- Paper Egg crate: 306,5 g
- PE polybag: 60 g
- Umbraco key: 0,5 g
- PE polybag: 1 g
- Cardboard inside: 26,5 g
- Cardboard outside: 207 g

WEIGHT PACKAGING - TOTAL
997 g

NUMPER OF PARCELS
1 pcs.

LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.
Please contact your local electrician.

- Lightbulb not included

Designed by Robert Dudley Best

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

STANDARD

- British voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20




Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

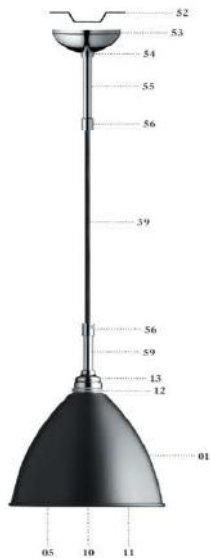

KOMPONENTS

- 01 // Shade Ø16 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube


Item no.: 001-0923X

MATERIAL

Shade: Charcoalblack, White or Grey
 Ceiling cup: Brass with lacquered surface
 Textile covered cord


Shade: Brass with lacquered surface
 Ceiling cup: Brass with lacquered surface
 Textile covered cord

INSTALLATION INSTRUCTIONS

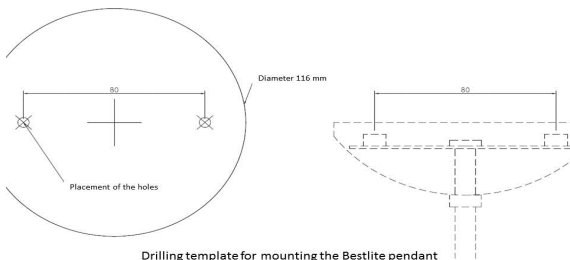

Drilling template for mounting the Bestlite pendant

PRODUCT

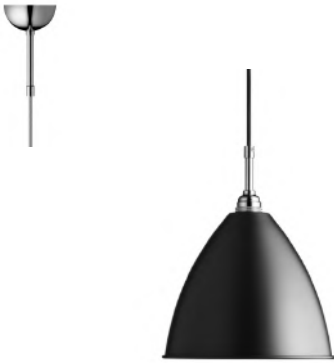

COLOURS



Item no.: 001-0913X
+ style code

DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE PENDANT LAMP BL9M

Shade and base: Black, White or Off-White - Powder coated aluminium
Ceiling cup: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20

Please contact us for other colours or finishes.

Order item - look for part number in the pricelist.

Series contains the following:

BL9S, BL9M, BL9L, BL9XL

FACTS

MEASUREMENT - L X W X H MM
Lamp rosette height: 35 mm
Lamp rosette diameter: Ø120 mm
Shade height: 180 mm
Shade diameter: Ø210 mm
Cord - total length w/sw: App. 2500 mm
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE
535 g netto

PACKAGING TYPE
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM
L:26 x W:40 x H:34 cm

WEIGHT PACKAGING - MATERIAL TYPE
- Bestlite brochure 120 x 170 mm: 66,5 g
- Paper Egg crate: 456,5 g
- Umbraco key: 5 g
- PE polybag: 1 g
- PE polybag: 60 g
- Cardboard inside: 38 g
- Cardboard outside: 532 g

WEIGHT PACKAGING - TOTAL
1629 g brutto


NUMBER OF PARCELS
1 pcs.

LIGHT SOURCE:
- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- *All lamps can be fitted with a dimmer.*
Please contact your local electrician.

- *Lightbulb not included*

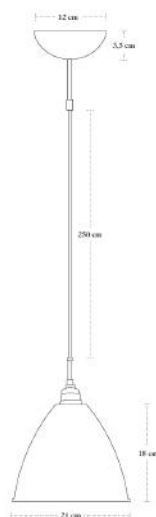

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

STANDARD

- British voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

KOMPONENTS

- 02 // Shade Ø21 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube


Item no.: 001--0913X

MATERIAL

Shade: Powder coated aluminium
Ceiling cup: Chromed steel
Textile covered cord



INSTALLATION INSTRUCTIONS

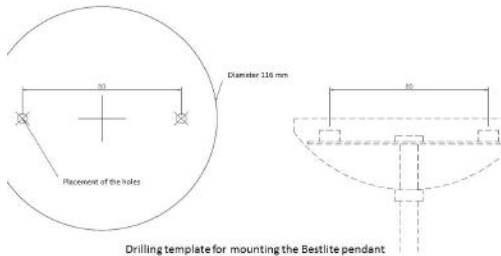

Designed by Robert Dudley Best

PRODUCT



Item no.: 001-0923X
+ style code

Don't polish the brass

COLOURS



DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE PENDANT LAMP BL9M

Shade: Charcoalblack, Matt-White or Grey
Ceiling cup: Brass with lacquered surface

Shade: Brass with lacquered surface
Ceiling cup: Brass with lacquered surface

RAL codes are indicative.

- Fabric wire - Black:
- Charcoal black/Brass / White inside // RAL 9011 / RAL 9003 // Gloss level 20 / Gloss level 20
- Grey w/Brass / White inside // RAL 2604005 / RAL 9003 // Gloss level 30 / Gloss level 20
- Brass w/Brass / White inside // - / RAL 9003 // - / Gloss level 20

- Fabric wire - Off-White:
- Matt-White w/Brass / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL9S, BL9M, BL9L, BL9XL

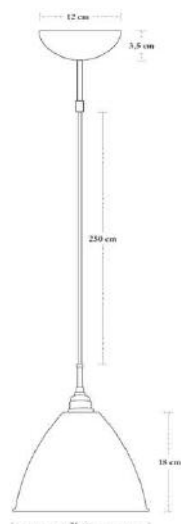

FACTS

MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm
Lamp rosette diameter: Ø120 mm
Shade height: 180 mm
Shade diameter: Ø210 mm
Cord - total length w/sw: App. 2500 mm
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE
535 g

PACKAGING TYPE
White cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM
L:26 x W:40 x H:34 cm

WEIGHT PACKAGING - MATERIAL TYPE

- Bestlite brochure 120 x 170 mm: 66,5 g
- Paper Egg crate: 456,5 g
- Umbraco key: 5 g
- PE polybag: 1 g
- PE polybag: 60 g
- Cardboard inside: 38 g
- Cardboard outside: 532 g

WEIGHT PACKAGING - TOTAL
1629 g

NUMBER OF PARCELS
1 pcs.

LIGHT SOURCE:

- Socket: E14 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 9 W = (40 WATT incandescent bulbs)
- Max wattage: 13 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 28 W = (40 WATT incandescent bulbs)
- Max wattage: 28 W

- All lamps can be fitted with a dimmer.
Please contact your local electrician.

- Lightbulb not included

Designed by Robert Dudley Best

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

STANDARD

- British voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

KOMPONENTS

- 02 // Shade Ø21 cm.
- 05 // E14 lamp holder
- 10 // Insulating ring
- 11 // Internal shade ring
- 12 // External shade ring
- 13 // Lamp holder cover
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 59 // Pendant tube

Item no.: 001-0913X


MATERIAL

Shade: Charcoalblack, White or Grey
 Ceiling cup: Brass with lacquered surface
 Textile covered cord

Shade: Brass with lacquered surface
 Ceiling cup: Brass with lacquered surface
 Textile covered cord



INSTALLATION INSTRUCTIONS

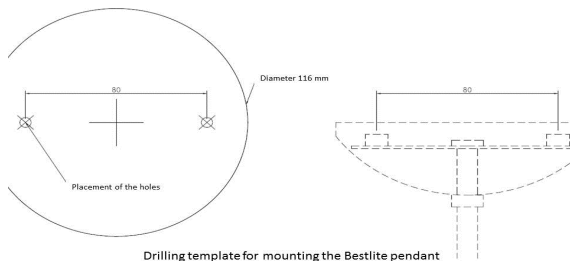

PRODUCT



Item no.: 001-0916X
+ style code

DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE PENDANT LAMP BL9L

Shade, base and cord: Black, White or Off-White
Ceiling cup: Chrome

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL9S, BL9M, BL9L, BL9XL

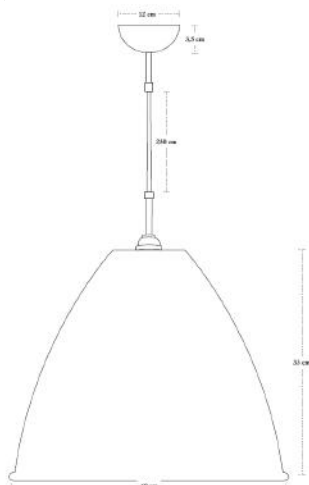

COLOURS



FACTS

MEASUREMENT - L X W X H MM
Lamp rosette height: 35 mm
Lamp rosette diameter: Ø120 mm
Shade height: 330 mm
Shade diameter: Ø400 mm
Cord - total length w/sw: App. 2500 mm
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE
1241 g netto

OUTER PACKAGING - TYPE
White hard cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM
L:43 x W:43 x H:39 cm

WEIGHT PACKAGING - MATERIAL TYPE
- LD polyethylene: 78 g
- LD polyethylene bottom: 56,5 g
- PE polybag bobble: 68,5 g
- PE polybag: 30 g
- Cardboard inside: 89,5 g
- Cardboard outside: 774 g

WEIGHT PACKAGING - TOTAL
2275 g brutto

NUMBER OF PARCELS
1 pcs.

LIGHT SOURCE:
- Socket: E27 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 15 W = (75 WATT incandescent bulbs)
- Max wattage: 18 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 52 W = (75 WATT incandescent bulbs)
- Max wattage: 52 W

- All lamps can be fitted with a dimmer.
Please contact your local electrician.

- Lightbulb not included

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

STANDARD

- British voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base

KOMPONENTS

- 03 // Shade Ø40 cm.
- 07 // E27 lamp holder
- 39 // Textile covered cord, round
- 52 // Mounting plate
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 57 // Interior screen ring


Item no.: 001--0916X

MATERIAL

- Shade: Powder coated aluminium
- Ceiling cup: Chromed steel
- Textile covered cord




INSTALLATION INSTRUCTIONS

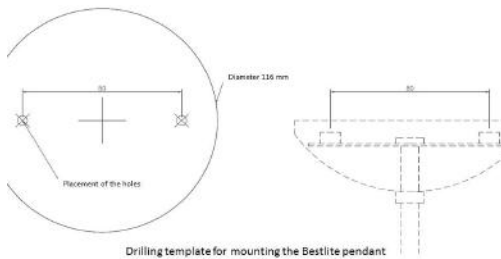

PRODUCT



COLOURS



Item no.: 001-0919X
+ style code

DESCRIPTION

Bestlite has been in continuous production since 1930. Robert Dudley Best created Bestlite design. He was highly influenced by the Bauhaus. In the past 80 years, people appreciated the lamps and it decorates many homes, hotels and restaurants worldwide. Loved by architects, designers and design aficionados throughout its 80-year history, today, Bestlite enjoys global iconic status.

VERSION - BESTLITE PENDANT LAMP BL9XL

Shade: Powder coated aluminium
Ceiling cup: Chromed steel

RAL codes are indicative.

- Fabric wire - Black:
- Black / White inside // RAL 9004 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - Off-White:
- Off-White / White inside // RAL 1015 / RAL 9003 // Gloss level 20 / Gloss level 20
- Fabric wire - White:
- White / White inside // RAL 9003 / RAL 9003 // Gloss level 20 / Gloss level 20


Please contact us for other colours or finishes.

VERSION

Order item - look for part number in the pricelist.

Series contains the following:

BL9S, BL9M, BL9L, BL9XL

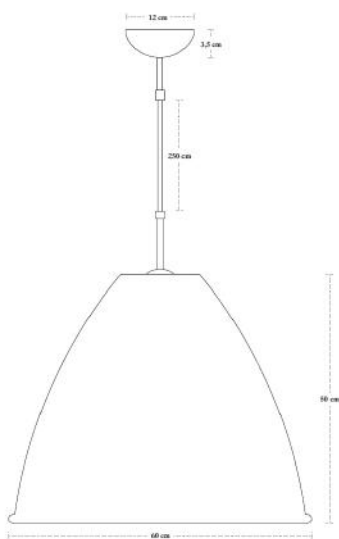

FACTS

MEASUREMENT - L X W X H MM

Lamp rosette height: 35 mm
Lamp rosette diameter: Ø120 mm
Shade height: 500 mm
Shade diameter: Ø600 mm
Cord - total length w/sw: App. 2500 mm
Cord - exposed out of lamp: App. 1980 mm

WEIGHT ITEM - LAMP INCL. WIRE
2500 g netto

PACKAGING TYPE
White hard cardboard box w/ 5ply corrugated

PACKAGING MEASUREMENT - L X W X H CM
L:640 x W:645 x H:560 cm

WEIGHT PACKAGING - MATERIAL TYPE

- LD polyethylene top: 319 g
- LD polyethylene bund: 123,5 g
- PE polybag bobble: 114,5 g
- PE polybag: 8 g
- Cardboard inside: 94,5 g
- Cardboard outside: 1897 g

WEIGHT PACKAGING - TOTAL
5200 g brutto

NUMBER OF PARCELS
1 pcs.

LIGHT SOURCE:

- Socket: E27 base
- Recommended light source: *All fluorescens light bulbs*
- Recommended wattage: 30 W - (150 WATT incandescent bulbs)
- Max wattage: 30 W

- Recommended light source: *Halogen light bulb*
- Recommended wattage: 105 W - (150 WATT incandescent bulbs)
- Max wattage: 105 W

- All lamps can be fitted with a dimmer.
Please contact your local electrician.

- Lightbulb not included

CLEANING AND MAINTENANCE

Use a soft damp cloth when cleaning your Bestlite lamp. Do not use household cleaners.

ACCESSORIES

-

ENVIRONMENT

-

TESTS

-

CERTIFICATION AND LABELS

CE-CERTIFIED

STANDARD

- British voltage: 230 V
- Frequency: 50 Hz
- Supply voltage: AC power ~
- Normally Closed: IP20



Class II / Double insulated



CE-Mark



Luminaires accepted for mounting on a flammable base


KOMPONENTS

- 04 // Shade Ø60 cm.
- 07 // E27 lamp holder
- 39 // Textile covered cord, round
- 52 // Mounting plate BL9
- 53 // Ceiling cup
- 54 // Screw for ceiling cup
- 55 // Cord tube
- 56 // Screw for cord tube
- 57 // Internal shade ring

Item no.: 001-0919X

MATERIAL

- Shade: Powder coated aluminium
- Ceiling cup: Chromed steel
- Textile covered cord

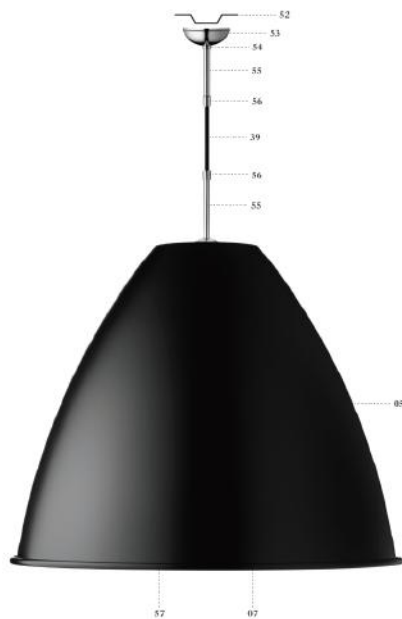

INSTALLATION INSTRUCTIONS

